




AQ061 USER MANUAL

AQQA Aquarium clip light

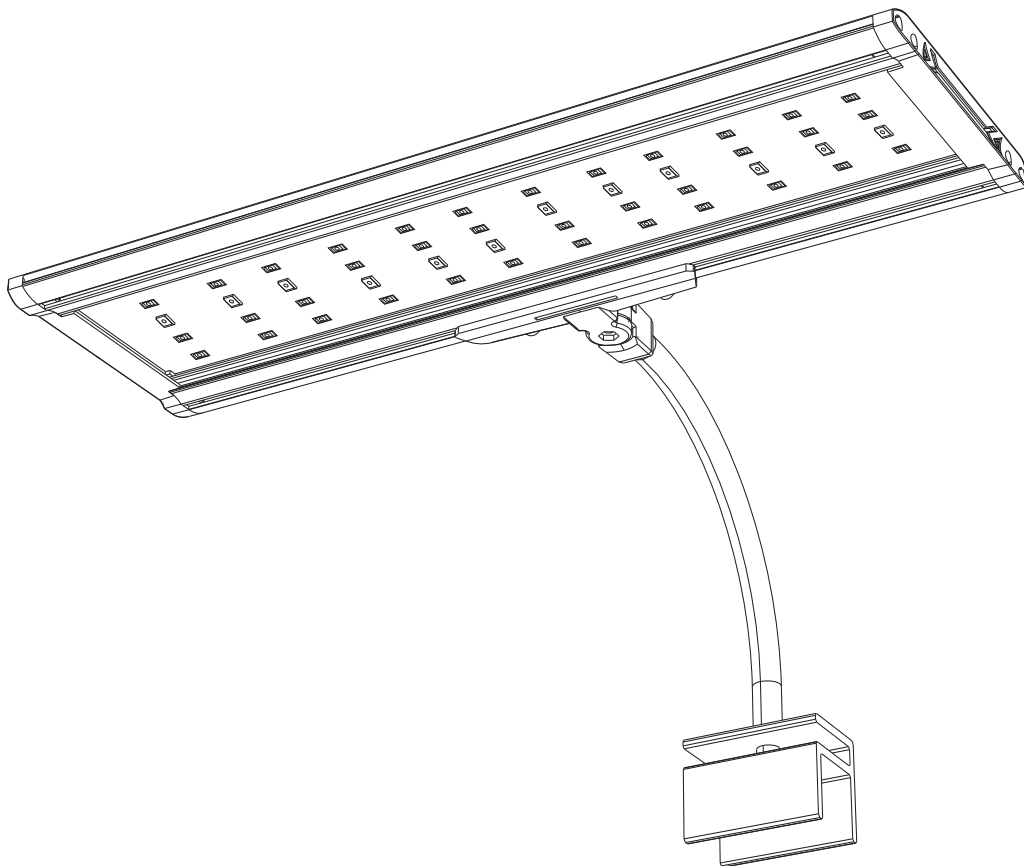

AQQA Aquarium clip lights use full spectrum lamp beads. It can be used for lighting aquatic plants and freshwater fish tanks.

1.PRODUCT FEATURES

24/7 Mode: The 24/7 mode simulates natural living environments, starting with warm orange light at sunrise, moving to 100% brighter full-spectrum light at noon, and then to starry blue light at night. The default light turns on automatically at 6 am and off at 22:58. The automatic on/off time can be postponed or advanced.

Flexible Gooseneck Tube: With a 7-inch long 360°flexible gooseneck tube, you can easily adjust the angle and direction of the light.


Aluminum Alloy Clip: The aluminum alloy clip is equipped with screws for tightening and are safe to use on framed or frameless aquariums up to 0.98 inches thick.

Timer: The timer button has three lighting cycles (6/10/12 hours) to choose from. Simply set the desired lighting time and it will automatically turn on and off every day.



Memory Function: In the event of a power outage, the light will retain its previous settings. Once the power is restored, the light will light up in the previously set color, brightness, and lighting time without resetting.

2.PRODUCT SPECIFICATIONS

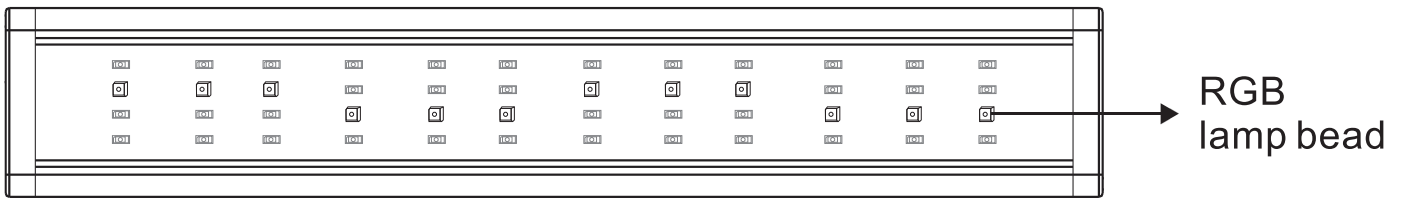
Model	AQ061					
Input voltage	AC100-240V					
Output voltage	DC12V					DC24V
Power	11W	18W	26W	30W	35W	45W
LED quantity (PCS)	36 PCS (White:18 PCS Blue:3 PCS Red:3 PCS Green:3 PCS RGB:9 PCS)	48 PCS (White:24 PCS Blue:4 PCS Red:4 PCS Green:4 PCS RGB:12 PCS)	72 PCS (White:36 PCS Blue:6 PCS Red:6 PCS Green:6 PCS RGB:18 PCS)	96PCS (White:48PCS Blue:8PCS Red:8PCS Green:8PCS RGB:24PCS)	120PCS (White:60PCS Blue:10PCS Red:10PCS Green:10PCS RGB:30PCS)	168PCS (White:84PCS Blue:14PCS Red:14PCS Green:14PCS RGB:42PCS)
Light size	10.2"X4"X0.39" (26X10X1cm)	14.1"X4"X0.39" (39X10X1cm)	22"X4"X0.39" (55X10X1cm)	29.9"X4"X0.39" (75X10X1cm)	38.1"X4"X0.39" (94X10X1cm)	45.7"X4"X0.39" (114X10X1cm)
Application	11~16inches (30~40cm)	16~24inches (40~60cm)	24~31.4inches (60~80cm)	32~40inch (80~100cm)	40~48inch (100~120cm)	48~55inch (120~140cm)
Power cord	2.2m(7.2ft)	2.2m(7.2ft)	2.2m(7.2ft)	2.2m(7.2ft)	2.2m(7.2ft)	2.2m(7.2ft)



3.METHOD OF APPLICATION

A. Press  for 8 lighting modes and 1 automatic dimming mode: (red) - (green) - (blue) - (orange) - (yellow) - (cyan blue) - (purple) - (full spectrum) - (automatic dimming mode) Click once to switch lighting modes, and double click  button to quickly turn on the full spectrum light.

Note: "Full spectrum mode" is followed by automatic dimming mode, indicating that only a single row of lamp beads is changing color, in the following order: yellow-green-cyan blue-blue-purple-orange-yellow.

B. Press  to select 5 levels to adjust the light brightness: 10% -25% -50% -75% -100%-75%-50%-25%-10%. (The automatic dimming mode and the 24/7 mode are not able to adjust the brightness).




Note: The light will flash once when the light brightness is adjusted to the maximum or minimum value.

C. Press button  to set the 6H, 10H, 12H lighting time or close timer.

6H Timer: The red indicator light below “6H” will flash continuously, and the LED light will automatically turn off after 6 hours. LED light will automatically come on at the same time the next day.

10H Timer: The green indicator light below “10H” will flash continuously, and the LED light will automatically turn off after 10 hours. LED light will automatically come on at the same time the next day.

12H Timer: The blue indicator light below “12H” will flash continuously, and the LED light will automatically turn off after 12 hours. LED light will automatically come on at the same time the next day.

D. Press button  to enter the 24/7 mode. Every time you press the button , you can select one of the 6 time points, (8:00), (10:00), (12:00), (15:00), (18:00) and (22:00). Operating method: If the local time is 8:00 am, select 8:00 am on the controller to enter. In the 24/7 mode, the light is on at 6:00 a.m. and off at 22:58 p.m. (Note: When entering 24/7 mode, other buttons can't be operated temporarily. If you need to exit 24/7 mode, press and hold  for 3 seconds to exit and restore other button functions).

4.ATTENTIONS

- √ Please read this user manual carefully before using and follow it strictly.
- √ Please keep the switch away from water since it is not waterproof.
- √ Please keep the light away from flammable items to avoid accidents.
- √ Please unplug the power and contact the seller if the light is not working properly. ****OPENING WILL VOID WARRANTY****
- √ Please unplug the power before maintenance.
- √ Please mind that the temperature range for the light is between 23°F~113°F (-5°C~45°C).

5.WARNING

To avoid possible electric shock, do not immerse the switch in the water. If the switch falls into the water or becomes wet, do not touch it until you have unplugged it. Basic safety precautions that should be observed are as follows:


- 1.Read and follow this user manual strictly.
- 2.DANGER- To avoid possible electric shock, special care should be taken since water is employed in the use of aquarium equipment. For each of the following situations, do not attempt to repair yourself. Instead, return the light to an authorized service facility for maintenance or discard it.

A. If the light falls into the water, DO NOT touch it. First unplug it, then retrieve it. If electrical components of the light get wet, unplug it immediately.

B. Carefully examine the light after installation. It should not be plugged in if there is water on parts that are not intended to be wet.

C. Do not operate the light if it has a damaged cord or plug, is malfunctioning, dropped, or damaged in any manner. The power cord of this light cannot be replaced. If the cord is damaged, the light should be discarded.

D. To avoid the possibility of the light plug getting wet, position the aquarium and its stand to one side of a wall mounted outlet to prevent water from dripping onto the outlet or plug. A “drip loop”, shown in the figure below, should be arranged by the user for each cord, which connects the light to the outlet. If an extension cord is used, the “drip loop” is the part of the cord below the level of the outlet or the connector that prevents water from traveling along the cord and coming in contact with the outlet. If the plug or outlet does get wet, DO NOT unplug the cord. Disconnect the fuse to the circuit breaker that supplies power to the light. Then, unplug and examine for the presence of water in the outlet. If you are not sure, consult a certified electrician.



3. Close supervision is necessary when the light is used near children.

4. To avoid injury, do not contact moving or hot parts.

5. Make sure the light is securely installed before operating it.

6. Read and observe all the important notices on the light.

7. If an extension cord is necessary, a cord with a proper rating should be used, such as rated amperes or watts. A cord rated for fewer amperes or watts than the appliance rating may overheat. Care should be taken to arrange the cord so that it will not be tripped over or pulled.

8. The light is intended FOR HOUSEHOLD USE ONLY.

9. SAVE THIS USER MANUAL.

6. AQQA LIMITED MANUFACTURER'S WARRANTY

We offer the end user of this product a manufacturer warranty of 2 years from the date of sale if this product was purchased from an AQQA[®]-authorised specialist dealer

Retain receipt for any future warranty claim. Conditions apply. Products are guaranteed by AQQA[®] Aquatic Supplies to the original purchaser against defective material and workmanship under normal use for a period up to 2 years from the date of the original purchase through an Authorized Dealer. Refer to the User Manual included with your product for specific warranty details.

Products have no warranty if:

1. The product has been serviced, modified or tampered with by anyone other than AQQA[®] Aquatic Supplies.
2. The product has been abused or damaged (including broken or cracked bulbs), and/or.
3. The product has been transported without proper packaging.
4. The product was purchased from an Unauthorized Reseller.

WARRANTY LIABILITY DISCLAIMER

In no event will AQQA[®] be liable for any consequential or incidental damages, including but not limited to, lost aquatic life, personal injury, property damage, equipment damage, lost profits, lost wages, lost savings, lost income, etc., arising out of the use of any AQQA[®] products.

1.0. Terms and Conditions of Warranty.

- 1.1. AQQA[®] warrants to the purchaser, for 2 years from date of original purchase through an Authorized AQQA[®] Reseller, free to repair or replace parts where fault is found due to defective materials or faulty workmanship and where goods do not operate in accordance with the instructions.
- 1.2. All claims for repair or replacement must be made at place of purchase.
- 1.3. Only the direct purchaser is entitled to warranty claims against us and these are not transferable without our consent.
- 1.4. The original and dated Proof of Purchase (receipt) must be supplied with all goods claims. Please also provide this Guarantee where possible.
- 1.5. Wear parts (e.g.: seals, suction devices, axes, pump wheels, light sources, pH electrodes, filter media, such as filter cartridges, as well as UVC burners), glass damage and the opening of the product, as well as structural changes or the use of non-AQQA[®] original parts are excluded from the guarantee.
- 1.6. All goods subject to claim under Guarantee should be prepared for transportation in the original packaging or other comparable packaging which offers the same degree of protection and AQQA[®] must incur no costs from the shipment.
- 1.7. Where claims on inspection reveal goods are in normal working order, AQQA[®] will request reimbursement of all reasonable costs incurred.
- 1.8. Warranty claims do not exist in the case of only insignificant deviations from the agreed or customary condition or usability, e.g. insignificant deviations in colour, dimensions and/or quality or performance characteristics of the products.
- 1.9. Our warranty obligation extends only to the delivery of newly manufactured products. Unless otherwise agreed, used products are sold as seen, excluding any warranty.

7.DISPOSAL

Do not dispose of this product as unsorted municipal waste. Collection of such waste separately for special treatment is necessary. This product has to be disposed of at an authorized place for the recycling of electrical and electronic appliances rather than being disposed of together with the domestic waste. Collecting and recycling waste is a way of saving natural resources. So, please consult with your local seller to make sure the product is disposed of in an environmentally friendly way.

8.PACKING LIST

1× Led light

1× AC/DC adaptor

1× User manual

9. CONTACT INFORMATION

Company Name: Shenzhen Aiku Pet Technology Co., Ltd

Add: Room 501, No.20, Lane 1, Lishipai, Dafapu Community

Bantian Street, Longgang District, Shenzhen Guangdong. 518000

Email: service@aqqapet.com

Website: <http://www.aqqapet.com>



@AQQA Aquarium



Company Name:EUREP GmbH
Address:Unterlettenweg 1a 85051
Ingolstadt Germany
E-mail:eurep@eurep-gmbh.com
Tel:+49 841 8869 7744



Company Name:Acumen IBC Ltd
Address:Ground Floor,94 Ock Street,
Abingdon, OX14 5DH"
E-mail:info@ukacumen.com
Tel:+44 7706338663



MADE IN CHINA