


AQ-120 USER MANUAL

AQQA Multi-function Starter Aquarium Kit

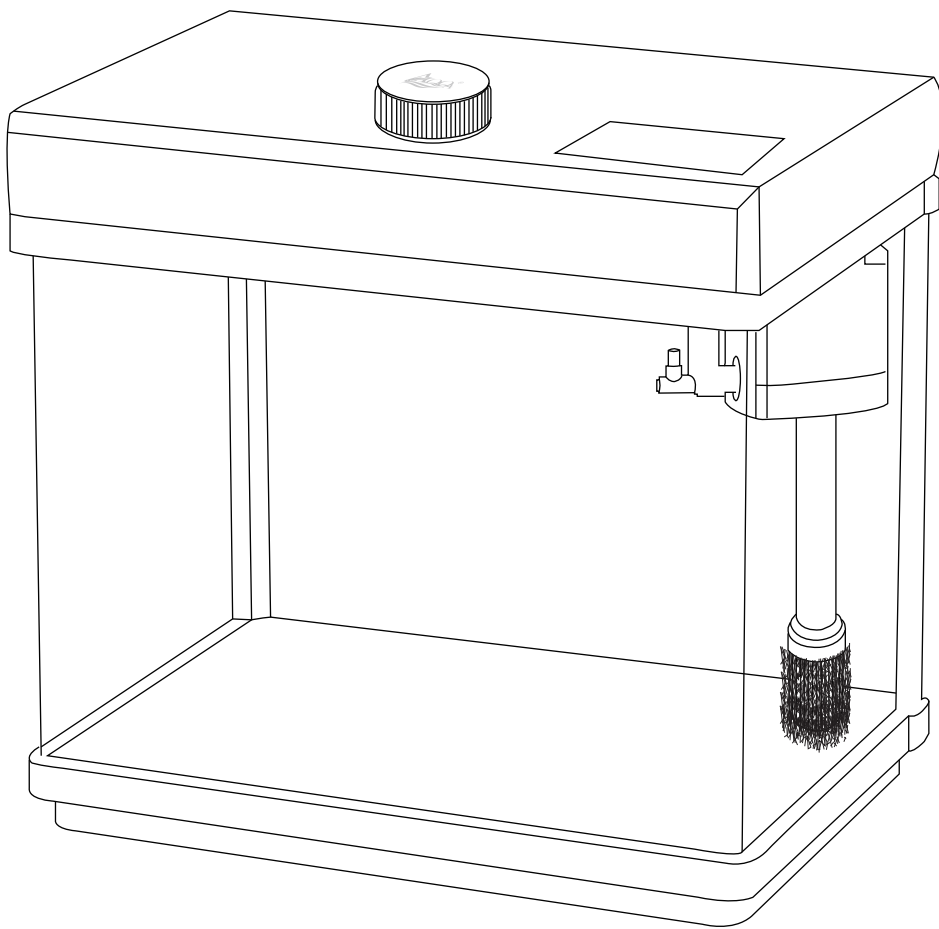

The AQQA Intelligent Mini Aquarium Kit is one of AQQA's New View Aquarium Kit Series. Perfect for an avid aquarist or anyone looking to break into the aquarium hobby, the Curve is a great mix of utility and beauty. The Curve is a stylish complement to any home or office space. AQQA will change your view!

1. PRODUCT FEATURES

Newly and simply style design: Its compact size makes it ideal for smaller spaces such as a dorm, table top or home decoration. It's suitable for kid raising their small aquarium pets.

Perfect starter aquarium: The kit includes the proper equipment for starting an aquarium. It's easy to operate for a beginner.

Perfect for plants, shrimp and small fish: The aquarium fits almost anywhere. It's the perfect size for plants, shrimp and small fish.

Curved-corner glass aquarium: The highest clarity glass with curved-corner design leads to the wide view.


LED hood and quick-change filter cartridges construction: The LED can be adjusted for 8 colors change (white-green-red-purple-lake green-blue-yellow-multi-color cycle), can make your fish tank more beautiful and fantasy. The filter foam can be reused. We advise you to clean the tank and filter every 1-2 weeks that it depends on your fish quantities.

3-in-1 Submersible pump: 3-in-1 power head filter performs three functions at the same time: water filtration, water circulation and aeration.

Digital temp display: Integrated with temp probe and digital temp display, it's easy to know the water temp in the tank. Please pay more attention to the temperature it has $\pm 2^{\circ}\text{C}$ tolerance.

Easy to set up and maintain: The design of this aquarium kit takes all the guesswork out of setting up an aquarium. Each item in the kit is easy to fit and maintain.

2. PRODUCT PARAMETER:

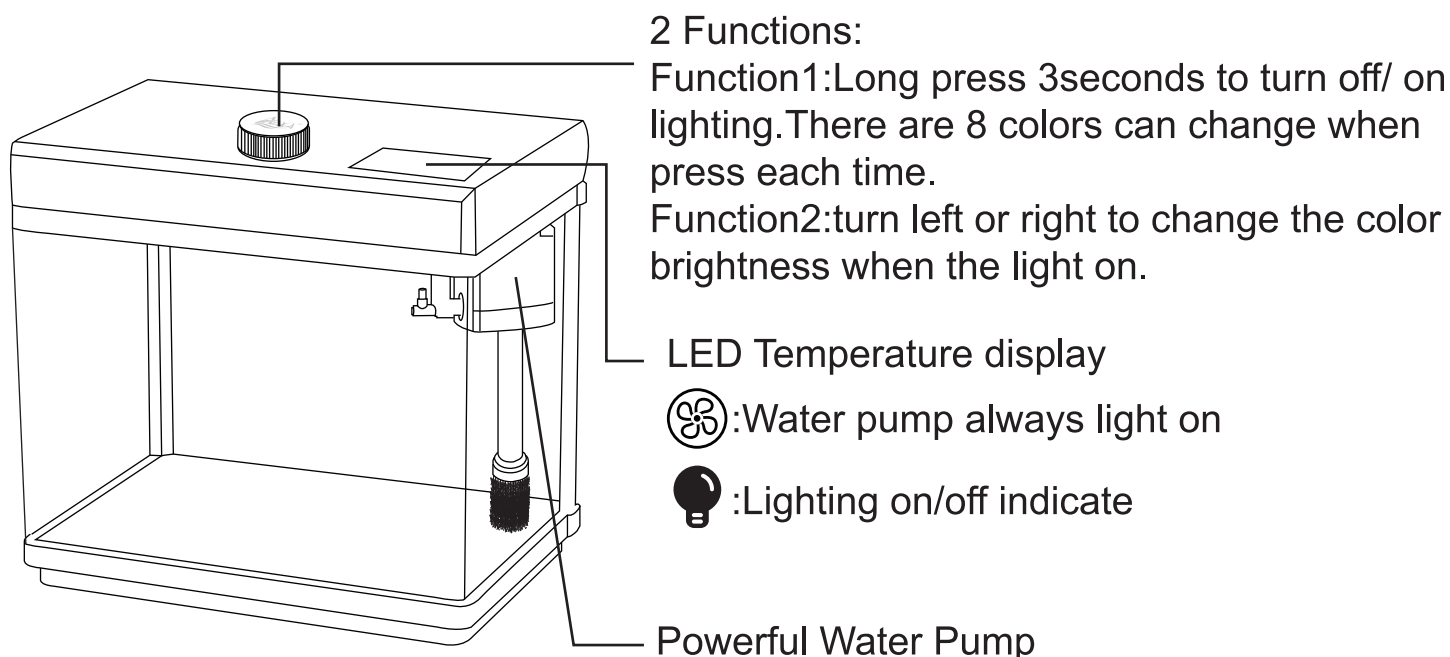

TANK

Material	Thickness	Dimension	Weight
Glass	1/8inch(3mm)	22*14.5*24.5Hcm(8.7×5.7×9.6 inch)	1.4kg


LEG LIGHT

Power	Voltage	LEDS	Length of Wire
3W	DC5V	5050 RGB	1.5m(5ft)

SUBMERSIBLE PUMP

Power	Volt/Freq	H.max	Q.max	Length of Wire
5W	AC110V /60Hz AC220-240V /50 Hz	80cm (2.6FT)	450L/H 120GPH	1.5m(5 ft)

3.Water Pump Assemble Instruction:

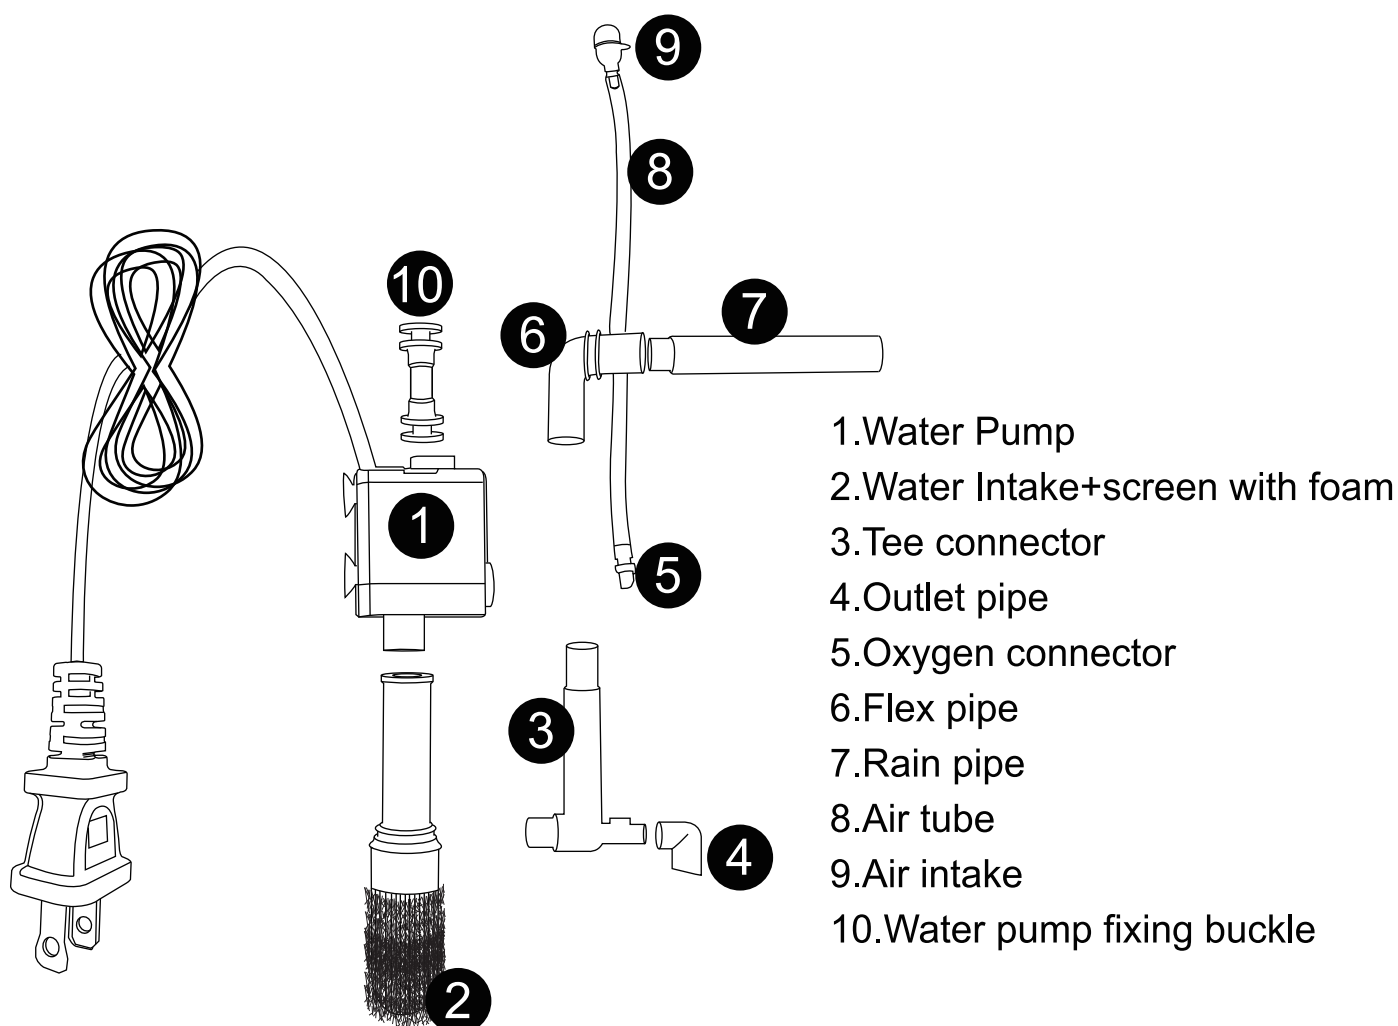

4. Quick Setup Guide:

I . Unpack the aquarium kit.

II . Check parts according to the packing list, if anything is missing or cracked, please contact the seller.


III . Tank setup:

a.First clean the tank and filter by clean water and towels. Do not use chemicals not intended for aquarium use.


b.Place the tank on a level, sturdy, completely flat surface in your desired location. Keep away from direct sunlight and air vents.

c.Rinse gravel and decor then decorate your aquarium before adding water to avoid over-filling.


d.Rinse the filter media cartridge and other filter parts , then fit the Submersible pump into the preformed hole as following instruction:

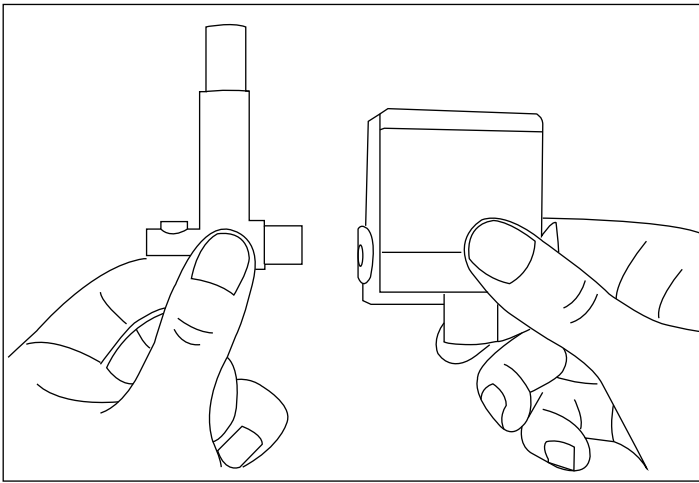


Step 1:Connect tee connector to water pump

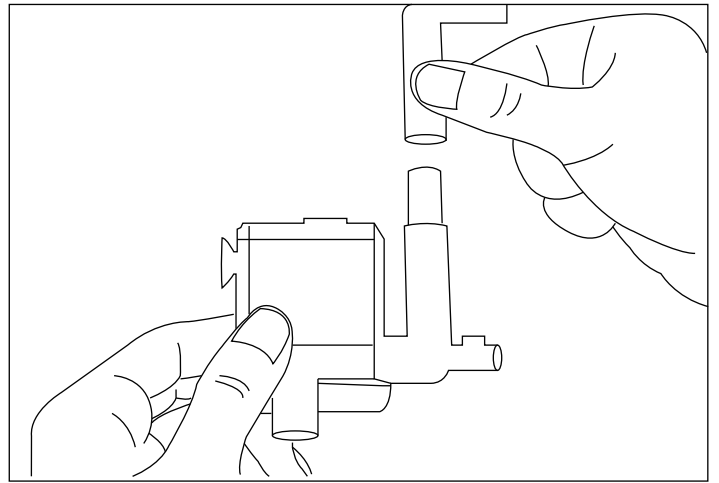


Step 2:Connect flex pipe onto water pump

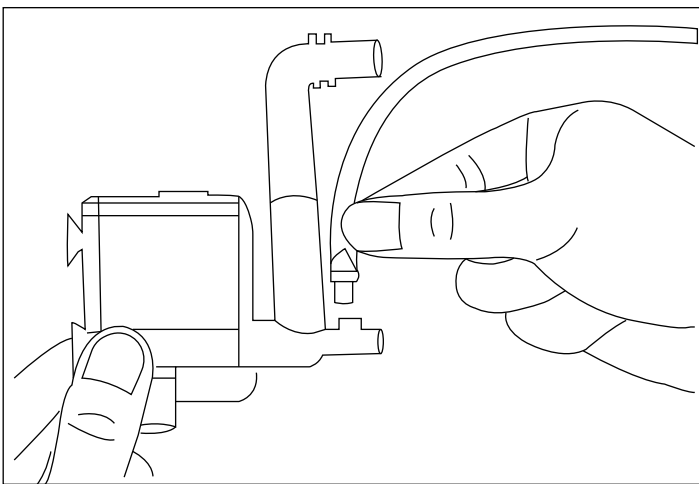


Step 3:Connect air tube onto tee connector

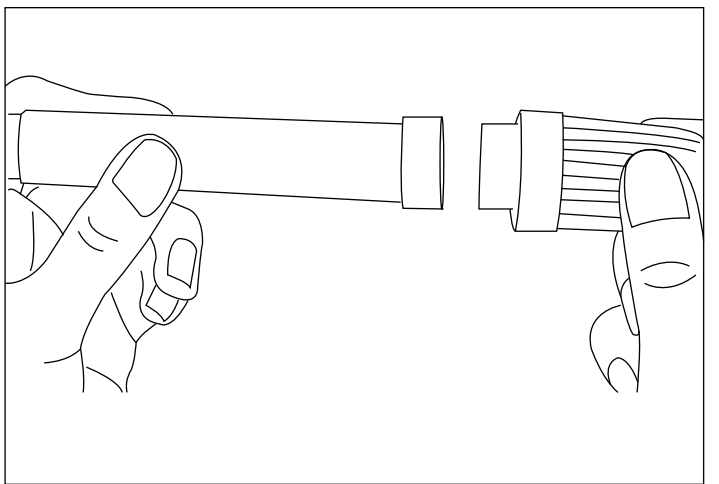


Step 4:Connect Intake screen and intake pipe

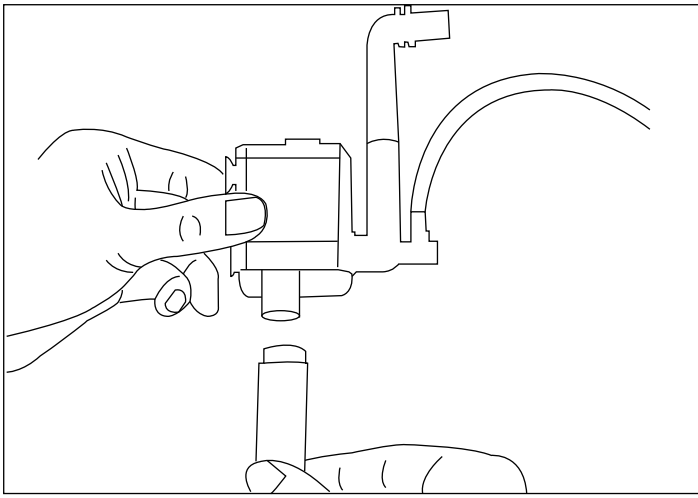


Step 5: Connect intake pipe onto water pump

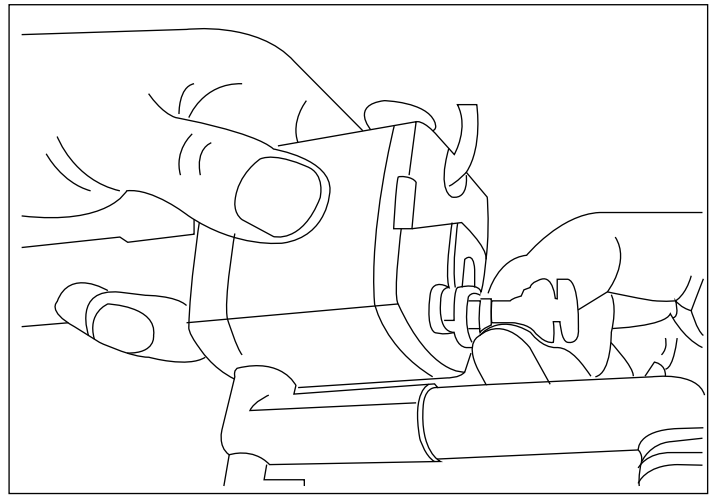

Step 6: Connect water pump fixing buckle

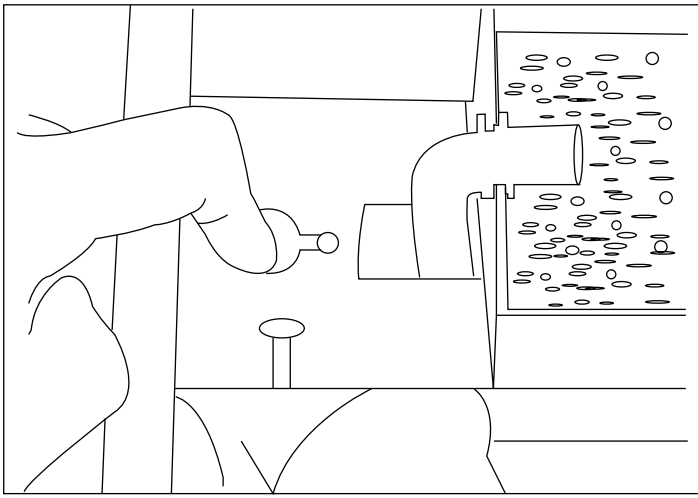

Step 7: Connect water pump fixing buckle onto fish tank

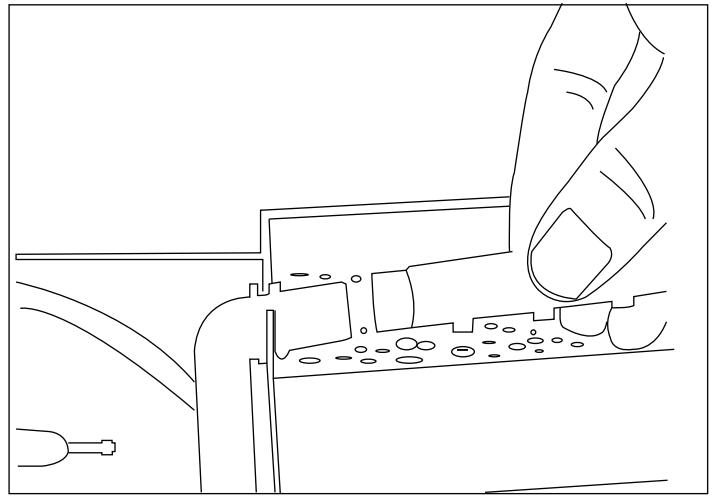

Step 8: Connect drain pipe

e. Fill the tank with room temperature tap water. Make sure the submersible pump is fully submerged in water. Water level must be to bottom outer edge of hood for proper filter operation.

5. PACKAGE INCLUDED:

- 1× Mini aquarium glass tank with LED temperature display
- 1× Submersible pump
- 1× Accessories bag
- 1× User manual

6. MAINTENANCE

Clean the pump and filter foam:

- ① Unplug the LED and submersible pump.
- ② Remove the used filter foam from the tank and clean. Install back after cleaning is finished.

Attention to the clean the submersible pump:


Unplug pump and carefully remove connector and pipe from the pump body. Then remove the pump from tank. Separate and clean all parts including impeller. Rinse thoroughly and reinstall. Recommend to clean the pump monthly.

7. TIPS TO SUCCESSFUL AQUARIUM:

- A. Keep the LED light on for a maximum of 8 hours per day.
- B. Change 25% the water once per week.
- C. Keep the water level and the right height in order to keep the power filter working.

8.WARNING: To guard against injury, basic safety precautions should be observed including the following:

1. Read and follow this user manual strictly.
2. **DANGER-**To avoid possible electric shock, special care should be taken since water is employed in the use of aquarium equipment. For each of the following situations, do not attempt to repair yourself. Return the appliance to an authorized service facility for service or discard the appliance.
 - A. If the appliance falls into the water, **DO NOT** reach for it! First unplug it and then retrieve it. If electrical components of the appliance get wet, unplug the appliance immediately.
 - B. Carefully examine the appliance after installation. It should not be plugged in if there is water on parts not intended to be wet.
 - C. Do not operate any appliance if it has a damaged cord or plug, if it is malfunctioning or if it is dropped or damaged in any manner.
 - D. To avoid the possibility of the appliance plug getting wet, position aquarium stand and tank to one side of a wall mounted receptacle to prevent water from dripping onto the receptacle or plug. A “drip loop”, shown in the figure below, should be arranged by the user for each cord connecting an aquarium appliance to the receptacle. The “drip loop” is the part of the cord below the level of the receptacle, or the connector. If an extension cord is used, to prevent water traveling along the cord and coming in contact with the receptacle. If the plug or receptacle does get wet, **DO NOT** unplug the cord. Disconnect the fuse to the circuit breaker that supplies power to the appliance. Then unplug and examine for the presence of water in the receptacle.

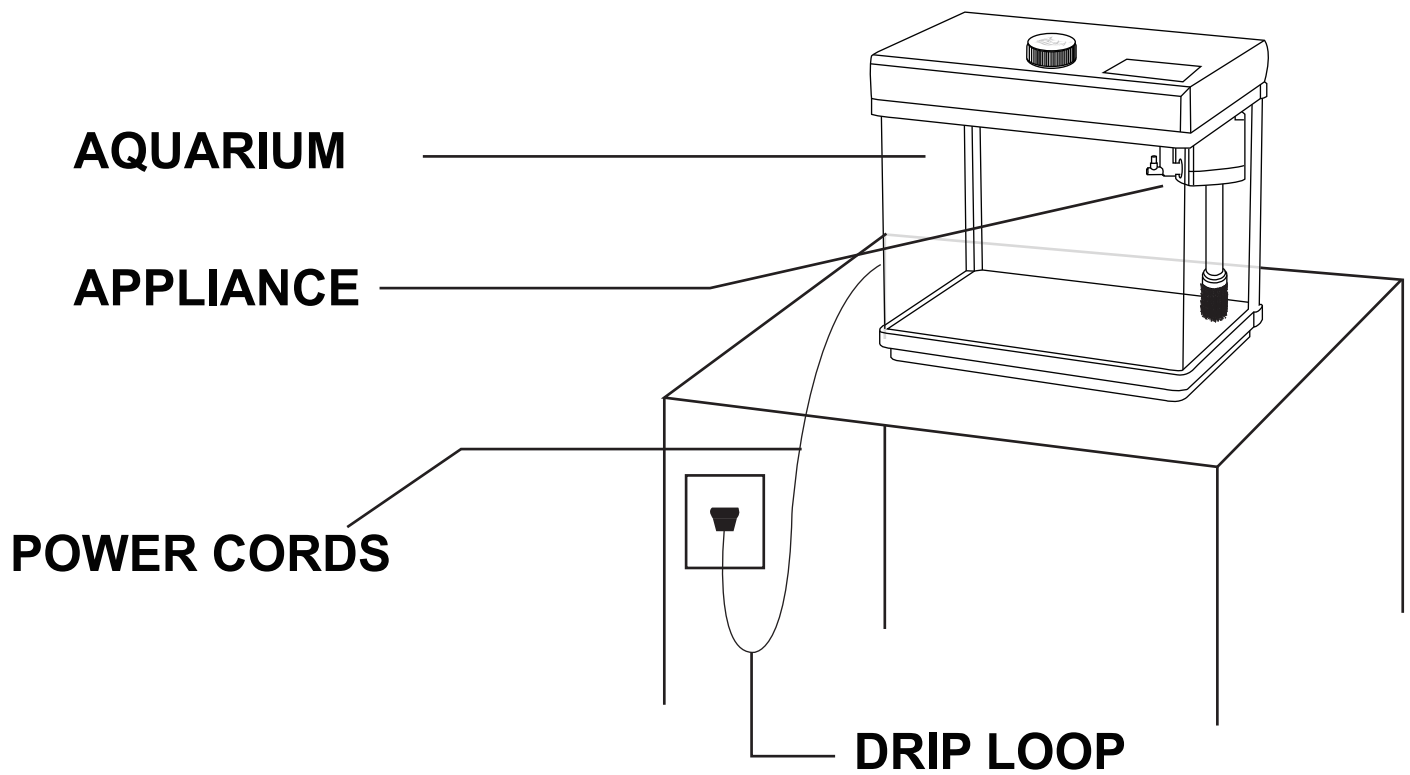


3. Close supervision is necessary when any appliance is used by or near children.
4. To avoid injury, do not contact moving parts or hot parts such as lamp bulbs and so on.
5. Always unplug the appliance from the outlet when not in use, before putting on or taking off parts, and before cleaning. Never yank the cord to pull plug from outlet. Grasp the plug and pull to disconnect.
6. Do not use an appliance for other than intended use. The use of attachments not recommended or sold by the appliance manufacturer may cause an unsafe condition.
7. Do not install or store the appliance where it will be exposed to the weather or to temperatures below freezing.
8. Make sure an appliance mounted on a tank is securely installed before operating it.
9. Read and observe all the important notices on the appliance.
10. If an extension cord is necessary, a cord with a proper rating should be used. A cord rated for less amperes or watts than the appliance rating may overheat. Care should be taken to arrange the cord so that it will not be tripped over or pulled.
11. The 2 conductor power cord has a polarized plug (one blade is wider than the other). As a safety feature, this plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician. Never use with an extension cord unless plug can be fully inserted. Do not attempt to defeat this safety feature.
12. The appliance is intended FOR HOUSEHOLD USE ONLY. Do not use or mount the appliance in such a way that the top vents are restricted or blocked. These vents are necessary to avoid over heating and ensure safe operating temperatures.
13. SAVE THIS USER MANUAL.

9.WARRANTY:

1. 1-year free warranty.
2. 1-month free return.
3. Free replacement for 3 months.

10.CONTACT INFORMATION:

Company Name :Shenzhen Aiku Pet Technology Co.,Ltd
Add:Room 501,No.20,Lane 1,Lishipai,Dafapu Community
Bantian Street,Longgang District ,Shenzhen Guangdong. 518000
Email:service@aqqapet.com
Website:http://www.aqqapet.com



Company Name:E-CrossStu GmbH
Address:Mainzer Landstr.69,Frankfurt am
Main,Hessen,60329
Email:E-CrossStu@web.de
Tel:+49 69332967674



Company Name:YH Consulting Limited
Address:C/O YH Consulting Limited Office
147,Centurion House,London Road,Staines
-upon-Thames,Surrey,London,TW18 4AX
Email: H2YHUK@gmail.com
Tel:+44 07514-677868

